



F40.22

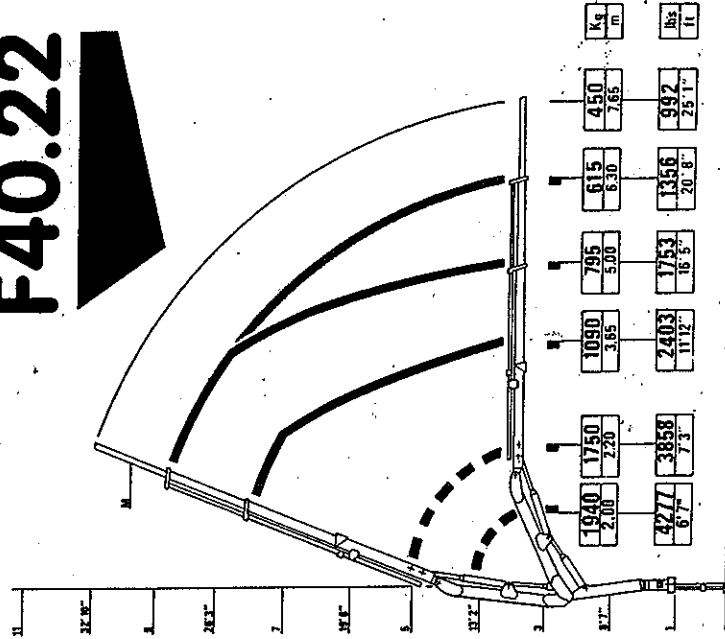

Capacità di sollevamento Lifting capacity Capacité de levage Hubvermögen	kNm 38,9 (4,0 tm)	lbs.ft 28681
Sbraccio standard Standard reach Bras standard Standardarm	m 6,41	ft 21'1"
Estensione idraulica Hydraulic extension Extension hydraulique Hydraulischer Ausschub	m 2,64	ft 8'7"

- PRIMO GANCIO
HEAVY LIFT HOOK
CROCHET CENTRAL
SCHWERLASTHAKEN
- GANCIO MOBILE
SWIVELING HOOK
CROCHET D'EXTREMITÉ
HAKEN FÜR AUSLEGER
- PROLUNGHE MECCANICHE
TELESCOPICHE
TELESCOPIC MANUAL
EXTENSIONS
RALLONGES MANUELLES
TELESCOPIQUES
VERLÄNGERUNGEN



Angolo di rotazione Rotation Schwenkbereich	370°	370°
Coppia di rotazione Rotation torque Couple de rotation Drehmoment	kNm 7,12 (726 Kqpm)	lbs.ft 5251
Pressione d'esercizio Working pressure Pression d'utilisation Betriebsdruck	MPa 23,5 (235 bar)	psi 3408

Portata della pompa Pump capacity Débit de la pompe Erforderliche Pumpenleistung	l/min 15	gal/min 4
Capacità serbatoio olio Oil tank capacity Capacité du réservoir d'huile Fassungsvermögen des Öltanks	l 33	gals 9
Peso della gru Crane weight Poids de la grue Kranengewicht	kg 600	lbs 1340

